



213222.00015

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:	)	
RAMESH MANTHA	:	Examiner: Danh C. Le
	)	
Application No.: 09/722,568	:	Group Art Unit: 2683
	)	
Filed: November 28, 2000	:	Confirmation No.: 9254
	)	
For: METHOD, SYSTEM AND	:	June 7, 2005
APPARATUS FOR IMPROVING	)	
RECEPTION IN MULTIPLE ACCESS	:	
COMMUNICATION SYSTEMS	)	

Mail Stop Issue Fee  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

CLAIM TO PRIORITY

Sir:


Applicant hereby claims priority under the International Convention and all rights to which he is entitled under 35 U.S.C. § 119 based upon the following Canadian

Priority Application:

2,323,164, filed October 11, 2000

Applicant's undersigned attorney may be reached in our Washington, D.C. office by telephone at (202) 625-3507. All correspondence should continue to be directed to our below-listed address.

Respectfully submitted,

A handwritten signature in black ink, appearing to read "Richard J. Bowen". The signature is fluid and cursive, with a horizontal line drawn underneath it.

Attorney for Applicant  
Registration No. 31,588

PATENT ADMINISTRATOR  
KATTEN MUCHIN ROSENMAN  
525 West Monroe Street  
Suite 1600  
Chicago, Illinois 60661-3693  
Facsimile: (312) 902-1061



Office de la propriété  
intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An Agency of  
Industry Canada

*Bureau canadien  
des brevets*  
Certification

*Canadian Patent  
Office*  
Certification

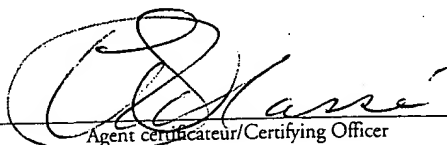
La présente atteste que les documents  
ci-joints, dont la liste figure ci-dessous,  
sont des copies authentiques des docu-  
ments déposés au Bureau des brevets.

This is to certify that the documents  
attached hereto and identified below are  
true copies of the documents on file in  
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial No:  
2,323,164, on October 11, 2000, by **RAMESH MANTHA**, for "Method, System and  
Apparatus for Improving Reception in Multiple Access Communication Systems".

App. No. 09/122,568  
Atty Docket No. 213222.15  
Inventor: RAMESH MANTHA

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

  
Agent certifiéur/Certifying Officer

May 2, 2005

Date

Canada

(CIPO 68)  
31-03-04

OPIC  CIPO

**Method, System and Apparatus For Improving Reception In Multiple Access  
Communication Systems**

**FIELD OF THE INVENTION**

The present invention relates to a method, apparatus and system for improving  
5 reception in a multiple access communication system. More specifically, the present  
invention provides a method, apparatus and system for improving reception in a multiple  
access communication system by subtracting known, or knowable, received interference  
signals from the total received signal.

**BACKGROUND OF THE INVENTION**

10 Many multiple access communication techniques are known including time  
division multiple access (TDMA), frequency division multiple access (FDMA), orthogonal  
and vector orthogonal frequency division multiplexing (OFDM or VOFDM), code division  
multiple access (CDMA), hybrids such as GSM, etc.

The ability of a radio receiver employing multiple access techniques to  
15 correctly receive a signal transmitted to it is generally limited by the signal to noise ratio  
(SNR) the receiver experiences. The SNR experienced at a receiver is the ratio of the desired  
received signal to all other noise sources, including thermal noise, radio noise (noise from  
electrical devices such as motors, etc.) and other, non-orthogonal, signals transmitted from the  
transmitter. As used herein the term "orthogonal signal" is intended to include all signals  
20 which are arranged to have cross correlations that are ideally zero, or very small, eg. CDMA  
signals are made orthogonal via application of Walsh Codes, TDMA signals are made  
orthogonal via assignment of time slots, etc. Clearly, the better the SNR experienced at a  
receiver, the better the ability of the receiver to correctly receive the signal and the better the  
theoretical capacity of the system, as will be discussed further below.

25 One example of a widely used multiple access technique is code division  
multiple access (CDMA), and specifically the direct sequence implementation of CDMA,  
which has recently gained significant support as the multiple access technique of choice for  
advanced wireless communication systems, such as mobile telephones or wireless local loop  
systems. As is known, CDMA can offer advantages over many other multiple access  
30 techniques, in that planning and management of the network is generally simplified, with the  
guard bands or guard times of FDMA or TDMA systems, for example, not being required and

- 2 -

good frequency reuse being obtained relatively easily.

As mentioned above, increases to the SNR experienced at a CDMA receiver are advantageous. Specifically, as the SNR experienced by a CDMA receiver is increased, more efficient use can be made of the CDMA code space, with modulation orders being increased (for example from QPSK to QAM 16) and/or higher rate error correcting codes can be used (for example increasing the code rate from 1/3 rate to 2/3 rate). As CDMA code space is a limiting factor in the capacity of a CDMA communications system, it is always desired to make efficient use of the code space.

Further advantages are obtained when transmissions in CDMA are performed at the lowest power level which is sufficient to provide the minimum SNR required for reception of the signal at the receiver at acceptable error rates. By broadcasting at this minimum power level, or very close to it, interference between adjacent base stations or sectors of a base station can be reduced, further increasing the efficiency and capacity of the CDMA system.

Other multiple access systems benefit from improved SNR's in manners similar to those of CDMA and, generally, an increase in the SNR of signals received at a receiver results in improved capacity and/or reliability of the communications system.

Accordingly, it is desired to have a system, method and apparatus which can allow a multiple access communications receiver to improve the SNR of desired signals it otherwise receives from a transmitter.

## SUMMARY OF THE INVENTION

It is an object of the present invention to provide a novel system, method and apparatus for improving reception in a multiple access communication system which obviates or mitigates at least some of the above-identified disadvantages of the prior art.

According to a first aspect of the present invention, there is provided a method of improving reception in a multiple access communications system, comprising the steps of :

- (i) determining at least one interfering signal transmitted from a transmitter;
- (ii) determining the received power level at a receiver of said at least one

determined interfering signal;

(iii) subtracting said at least one determined interfering signal, at said received power level, from the total signal received at said receiver; and

- (iv) determining a desired signal from the result of said subtraction.

- 3 -

According to another aspect of the present invention, there is provided a multiple access communication system including a plurality of subscriber stations and at least one base station to transmit signals to said subscriber stations, said subscriber stations comprising:

- 5 means to receive said signals transmitted by said at least one base station;
- means to determine at least one interfering signal transmitted by said base station and the received power level of said at least one interfering signal;
- means to subtract said determined at least one interfering signal at said received power level from said received signals; and
- 10 means to determine a desired signal from the result of said subtraction.

The present invention provides an apparatus, system and method for improving reception in a multiple access telecommunications system, by determining and subtracting known, or knowable, interfering signals from the total signal received at a subscriber station to obtain desired signals. Common channel signals, such as primary and secondary  
15 synchronization signals, or any other known or knowable signals which act as interference to a desired signal can be subtracted from the signals received from a transmitter serving the receiver. Such interfering known or knowable signals received from other transmitters, such as adjacent sectors (in multi-sector wireless network systems) or adjacent base stations (in wireless networks) can also be subtracted. Further, known or knowable signals which are  
20 effectively interfering common channels to the receiver, such as orthogonal channels of an adjacent base station or sector, can also be subtracted.

In a 3GPP-type system, a receiver can subtract the primary and secondary synchronization signals of the transmitter serving it, as well as the same signals and the pilot channel signals of one or more adjacent sectors and/or base stations. In an IS-95-type system,  
25 a receiver can subtract common channels of adjacent base stations and sectors. In other systems, a receiver will be able to subtract known or knowable interfering signals of transmitters.

## BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will now be described, by way  
30 of example only, with reference to the attached Figures, wherein:

Figure 1 shows a multiple access communications system;

Figure 2 shows a schematic representation of an orthogonal signal and an

- 4 -

interfering signal broadcast and received at a receiver; and

Figure 3 shows a multiple access communications system with multi-sectored base stations.

## DETAILED DESCRIPTION OF THE INVENTION

5 While the following discussion concentrates primarily on direct sequence CDMA as a multiple access technique, and more specifically on the proposed 3GPP implementation, the IS-95 standard and the like, the present invention is not so limited and can be usefully employed with any receiver receiving multiple access signals wherein a received known, or knowable, signal that is interfering with a received desired signal can be  
10 subtracted from the total received signal to improve the reception of the desired signal.

A multiple access communication system is indicated generally at 20 in Figure 1. System 20 includes a plurality of transceivers, such as base stations 24, which are connected via suitable backhubs (not shown) and gateways (not shown) or the like to a public switched telephone network (PSTN) (not shown), other base stations 24, packet data networks  
15 such as the Internet (not shown) and/or any other network of interest. As mentioned above, system 20 employs a suitable multiple access technique and specifically, in this example, employs DS-CDMA.

Each base station 24 defines a cell 28 within which it can communicate with a plurality of transceivers, such as subscriber stations 32. A subscriber station 32 can be a  
20 mobile telephony device, a mobile data device or a wireless local loop device (providing telephony and/or data services). A cell 28 can include only one type of subscriber station 32 (such as mobile voice telephony devices) or a variety of types of subscriber stations 32 (such as mobile voice telephony and fixed voice and/or data devices). At any one time, a subscriber station 32 is typically served by the base station 24 which it can receive with the best signal to  
25 noise ratio (SNR).

Data transmitted from a base station 24 to a subscriber station 32 is typically encoded with an error correcting code, such as a convolutional code, and this is typically described in terms of the resulting effective information rate. Specifically, transmissions are described as being coded at 1/3, 1/2, 2/3, 3/4, etc. rates (i.e. – at 1/2 rate, two bits of data are  
30 transmitted for every one actual information bit, at 3/4 rate, four bits of data are transmitted for every three actual information bits). When low SNR's are expected at a subscriber station 32, low coding rates are employed to ensure acceptable bit and/or frame error rates are

- 5 -

experienced. As the SNR experienced at a subscriber station 32 improves, higher rate codes can be employed (e.g. – changing from a 1/4 code to a 1/2 code) with a resulting improvement in the efficiency at which the resources (transmission capacity or bandwidth) of system 20 are used.

5 Similarly, when relatively low SNR's are experienced at a subscriber station 32, transmitted data is typically modulated using low order schemes, such as QPSK, to improve the ability of the subscriber station 32 to reliably receive the transmitted data. As the SNR experienced at the subscriber station 32 improves, more aggressive (higher order) modulation schemes, such as QAM 16, QAM 64 or QAM 256 modulations can be employed,  
10 again resulting in an improvement of the efficiency at which the resources (transmission capacity or bandwidth) of system 20 are used.

In other circumstances, if the SNR of the signal received at a subscriber station 32 improves, the power at which that signal is transmitted can be decreased until the SNR just exceeds the level needed to reliably receive the signal at a given code rate and/or modulation  
15 order and thus the degree to which the signal interferes with reception of signals at other subscriber stations 32 can be reduced, allowing those subscriber stations 32 to obtain an improved SNR.

The combinations of error coding and modulation schemes employed can be selected for a given SNR level to achieve a desired probability of frame error rate for  
20 transmissions while making efficient use of the resources of system 20. Clearly, any improvement in the SNR experienced at a receiver can provide an improvement in system efficiency and/or reliability.

In modern CDMA systems and other multiple access systems, channel schemes are employed to organize and permit acquisition, setup and use of communication between  
25 base stations 24 and subscriber stations 32. Typically, some of these channels are common channels, i.e. - are broadcast to all subscriber stations 32 in a cell 28, and other channels are orthogonal channels. As is discussed below, in some cases, common channels act as interference to other signals broadcast to subscriber stations 32 and orthogonal channels from a transmitter can act as interference to subscriber stations 32 receiving signals from other  
30 transmitters.

System 20 can be a system constructed in accordance with standards such as IS-95, wCDMA, CDMA2000, the proposed 3GPP system presently being standardized, or



- 6 -

any system employing a channel scheme with one or more common channels or other interfering channels over which known or knowable data is transmitted. While the following discussion refers to the above-mentioned proposed 3GPP system, the present invention is not limited to this system as will be apparent to those of skill in the art. As used herein, the term  
 5 "knowable" signal is intended to comprise any signals which can be determined by a receiver by any means. Examples include scrambled signals, which can be descrambled by a receiver once a descrambling code is known, signals which can be determined after explicit or blind detection operations, etc.

In the proposed 3GPP system, the common channels broadcast in the downlink  
 10 direction (i.e. - from base station 24 to subscriber stations 32) include a primary synchronization channel (PSCH) and a secondary synchronization channel (SSCH). In the 3GPP system, many channels (including the orthogonal channels) are broadcast in frames of 10ms duration, wherein each frame includes fifteen slots.

As discussed in the 3GPP documentation, the PSCH is used by subscriber  
 15 stations 32 to determine the timing of slots within frames transmitted by a base station 32. A predefined data sequence is transmitted in the slots and frames of the PSCH and this sequence has been defined and arranged such that subscriber stations 32 can determine the start time of slots in frames transmitted by the base station 32.

Once the slot timing has been determined by a subscriber station 32 from the  
 20 PSCH, the SSCH is examined by the subscriber station 32 to determine the timing of the frames of the slots and other information, including scrambling codes used by the base station 24, etc. The acquisition and processing of the PSCH and SSCH channels is performed at start up of a subscriber station 32 within system 20 and, in mobile systems at least, is performed on an ongoing basis for adjacent cells to permit handoffs between cells.

25 While such a system does result in a flexible and robust communication system, it suffers from disadvantages in that the common channels act as interference at the subscriber stations 32 in the cell 28 with respect to the other received signals, reducing the SNR experienced at the subscriber stations 32.

Figure 2 shows a simplified representation of the transmission of a desired  
 30 signal "D<sub>1</sub>" and the PSCH "s" being combined and received at a subscriber station 32. As shown in the Figure, D is spread by multiplying it with the 'chips' c<sub>1</sub> through c<sub>i</sub> of a preselected spreading code. This results in the product "D<sub>1</sub>c<sub>1</sub>, D<sub>1</sub>c<sub>2</sub>, D<sub>1</sub>c<sub>3</sub> ... D<sub>1</sub>c<sub>i</sub>" which has

- 7 -

some amount of gain performed on it by amplifier 90. The PSCH, which comprises a predefined series of chips  $s_1$  through  $s_i$ , has some amount of gain performed on it by amplifier 94 and is added to the above-mentioned product, at summer 98, to obtain the result " $D_1c_1+s_1, D_1c_2+s_2, D_1c_3+s_3 \dots D_1c_i+s_i$ ". This result is broadcast to a subscriber station 32 over radio link 102. Some amount of noise "n" is inevitably added to the result during the radio broadcast, as represented by the summer in radio link 102.

At the receiver of the subscriber station 32, the received signal is of the form " $D_1c_1+s_1+n, D_1c_2+s_2+n, D_1c_3+s_3+n \dots D_1c_i+s_i+n$ " and a dot product operation 106 is performed on this result to obtain " $D_1(c_1c_1+c_2c_2+c_3c_3+ \dots + c_ic_i) + (c_1s_1+c_2s_2+c_3s_3+ \dots c_is_i) + n$ ", where the effect of noise n has lumped and represented as a single value. As it is known that the values of the chips "c" can only be -1 or +1 and the values of primary synchronization chips "s" can only be -1 or +1, this result can be simplified to " $4D_1 + (c_1s_1+c_2s_2+c_3s_3+ \dots c_is_i) + n$ ". In conventional communication systems, an estimate is then performed by a suitable means, a viterbi decoder for example, from this result to determine the value of D at the receiver.

While this system has been successfully employed in the past, the present inventor has realized that the term " $(c_1s_1+c_2s_2+c_3s_3+ \dots c_is_i) + n$ " in the result is, in fact, interference to the desired signal D, thus reducing the overall SNR experienced at a receiver and that similar interference will also occur from the SSCH signal. In fact, the interference term can be written " $(c_1sp_1+c_2sp_2+c_3sp_3+ \dots c_isp_i) + (c_1ss_1+c_2ss_2+c_3ss_3+ \dots c_iss_i) + n$ ", where  $sp_i$  represents the PSCH signal and  $ss_i$  represents the SSCH signal.

The present inventor has determined that the SNR experienced at a subscriber station 32 can be improved by subtracting the received PSCH and SSCH signals from the signals received at the subscriber station 32. Specifically, by receiving the PSCH and SSCH signals to determine the timing of the frames and slots transmitted by base station 24, subscriber station 32 has also determined the power at which the PSCH and SSCH signals have been received at the subscriber station 32. Therefore, once acquisition has been achieved and a subscriber station 32 is operating normally, the subscriber station 32 knows the PSCH and SSCH data it has received and the power level they were received at. In accordance with the present invention, the receiver in subscriber station 32 then subtracts these known signals from the total signal received at the subscriber station 32 to reduce this source of interference to other received signals. Thus, the term " $(c_1sp_1+c_2sp_2+c_3sp_3+ \dots c_isp_i) +$

- 8 -

$(c_1ss_1 + c_2ss_2 + c_3ss_3 + \dots c_i ss_i) + n$  can be reduced to "n" as the values of each  $c_i$  and  $sp_i$  (primary synch) and  $ss_i$  (secondary synch) will be known at the receiver.

It is known that as much as 20% or more of the total power transmitted by a base station 24 will typically be utilized to transmit the PSCH and SSCH channels. As will be  
 5 apparent, subtracting the PSCH and SSCH signals from the total received signal at a subscriber station 32 can result in a corresponding improvement to the SNR of the subscriber station 32.

While the subtraction is shown in Figure 2 as being performed at the symbol level, in some circumstances it will be preferred that the subtraction be performed at the chip  
 10 level and appropriate methods of implementing such will now be apparent to those of skill in the art. By performing the subtraction at the chip level, data signals D, U, etc. which are transmitted at different symbols rates, but the same chip rate, can be appropriately processed.

The present invention is not limited to the reduction of interference by the subtraction of synchronization channels and, in fact, any interfering signal which is known or  
 15 knowable, such as any other communication system control signal or information signal, can be subtracted from the total signal received at a receiver to improve reception of a desired signal.

The present inventor has also developed a second embodiment of the present invention which can further improve the performance of system 20 in some circumstances.  
 20 One of the limiting factors of the performance in CDMA systems, or in other multiple access systems, is interference from base stations 24 in adjacent cells 28. As shown in Figure 1, a cell 28 is the geographic area which can be reliably serviced by a base station 24. While cells 28 are commonly illustrated as having regular shapes, commonly hexagonal or circular (as illustrated in Figure 1), typically a cell 28 does not have a regular shape due to geographical  
 25 features, such as hills, valleys, buildings, bridges, etc., or other conditions which affect the distance the radio signals from a base station 24 can reliably propagate.

Due to the irregular shape of cells 28, it is not uncommon that a cell 28 includes areas 36 that overlap with an adjacent cell 28. Such areas of overlap can also be formed intentionally by network planners to allow for handoff (transfer of a subscriber station  
 30 32 from one cell to another) or to provide additional capacity in "hot spots" in a network. In the illustrated configuration of system 20 in Figure 1, four areas of overlap (36ab, 36ac, 36bc, and 36abc) are shown between cells 28a, 28b and 28c.

While a subscriber station, such as subscriber station 32<sub>1</sub>, can be serviced from either base station 24a or 24c, in this example 24a, downlink transmissions from the other base station, 24c in this example, appear to subscriber station 32<sub>1</sub> as interference to the downlink transmissions from base station 24a. Any subscriber station 32, such as subscriber station 32<sub>1</sub> which receives the downlink transmission of more than one base station 24 will experience a reduction in its SNR with respect to the downlink transmissions received from the base station 24 that is presently servicing it. In fact, even subscriber stations, such as station 32<sub>2</sub>, that are outside of overlaps 36 where another base station could be reliably received, will experience some interference from those other base stations 24, although at low received power levels, thus reducing their SNR. Some other subscriber stations, such as subscriber stations 32<sub>3</sub> and 32<sub>4</sub>, do not receive significant levels of interference from other base stations 24 as they are located well outside of the effective propagation area of such adjacent base stations 24. However, in a system 20 with multiple cells 28, there is typically only a relatively small number of subscriber stations 32 which do not receive interference from adjacent base stations 24 that measurably degrades their SNRs.

Accordingly, the present inventor has determined that a subscriber station 32 can also improve its SNR by subtracting known or knowable channels received from one or more adjacent base stations 24. Specifically, at start up, and on an ongoing basis, a subscriber station 32 performs an sequence of operations wherein it determines the base station 24 that it can best receive (based upon the best SNR). In this second embodiment of the present invention, a subscriber station 32 can re-perform this acquisition sequence of operations to also determine the base station 24 which it can receive at the next-best levels (typically, the base station receiver at the next highest received power level). If a subscriber station 32 determines that this next-best base station 24 is being received at a power level which is higher than a pre-defined minimum power level, it will proceed to subtract the signals that it knows, which are received from the next-best base station 24, from the total signal it receives to improve the SNR of the base station 24 it is being serviced by as described below.

If the next-best base station 24 is received at a power level less than the pre-defined level, it is deemed that the potential benefit of subtracting the signals received from it is not sufficient to justify performing these steps, and no determination and subtraction of these signals will be performed. As will be apparent, this determination of next-best received base station will be performed, from time to time, to ensure that as reception conditions

change over time an appropriate action is taken.

If the next-best base station is received at a power level greater than the pre-defined minimum, the subscriber station 32 determines the slot and frame timing and the power levels of the transmissions from the second base station 24, using the same techniques 5 as before, and subtracts the PSCH and SSCH of the second base station 24 in a manner similar to that described above. Specifically, base station 24 will receive a signal  $4D1 + (c_{11}sp_{11} + c_{12}sp_{12} + c_{13}sp_{13} + \dots c_{1i}sp_{1i}) + (c_{11}ss_{11} + c_{12}ss_{12} + c_{13}ss_{13} + \dots c_{1i}ss_{1i}) + (c_{21}sp_{21} + c_{22}sp_{22} + c_{23}sp_{23} + \dots c_{2i}sp_{2i}) + (c_{21}ss_{21} + c_{22}ss_{22} + c_{23}ss_{23} + \dots c_{2i}ss_{2i}) + n$ , where  $c_{1i}$ ,  $sp_{1i}$  and  $ss_{1i}$  are the chip, primary and secondary synch signals of the base station 24 and  $c_{2i}$ ,  $sp_{2i}$  and 10  $ss_{2i}$  are the chip, primary and secondary synch signals of the next-best base station 24. A dot product is performed on this received signal and the terms  $“(c_{11}sp_{11} + c_{12}sp_{12} + c_{13}sp_{13} + \dots c_{1i}sp_{1i})”$ ,  $“(c_{11}ss_{11} + c_{12}ss_{12} + c_{13}ss_{13} + \dots c_{1i}ss_{1i})”$ ,  $“(c_{21}sp_{21} + c_{22}sp_{22} + c_{23}sp_{23} + \dots c_{2i}sp_{2i})”$  and  $“(c_{21}ss_{21} + c_{22}ss_{22} + c_{23}ss_{23} + \dots c_{2i}ss_{2i})”$  are subtracted to obtain  $4D1 + n$ , from which the desired signal  $D$  can be determined. Similar operations can 15 be performed for other multiple access systems, such as IS-95 or other wireless systems.

In addition to known interfering common channels, channels which are broadcast as orthogonal channels by an adjacent base station 24 also serve as interference to subscriber stations 32 which are being served by a first base station 24, either because they use a scrambling code and/or Walsh code which is used by the first base station and/or 20 because the timing of their transmission is not synchronized with that of the first base station.

If the information transmitted in an orthogonal, but interfering, channel from another base station 24 is known, or can be determined (i.e. – is knowable), by a subscriber station 32, that orthogonal channel can also be subtracted from the total received signal at the subscriber station 32, further improving the SNR of the desired signals received at the subscriber station 25 32.

As a specific example, in systems adhering to the proposed 3GPP standard, at least one orthogonal channel at an adjacent base station will be known or knowable by a subscriber station 32. Specifically, a pilot channel (PICH) is transmitted by each base station 24 and is used for carrier offset determination at subscriber stations 32 and for other purposes. 30 The pilot signal comprises a series of 1's that are scrambled according to the scrambling code of the transmitting base station 24 and transmitted over a pre-defined channel.

Accordingly, after a subscriber station 32 has determined that it is receiving

interference from an adjacent base station at a power level above the pre-defined level, it can determine the scrambling code group of this next best base station 24, determine the actual scrambling code from the other information transmitted by the next best base station 24, in the same manner that a subscriber station 32 served by that base station 24 would determine the scrambling code and determine the signal that would result from the scrambled series of "1's".

Alternatively, the scrambling code can be directly communicated to the subscriber station 32 in a variety of manners, including via a transmission from the base station 24 serving it which can transmit the scrambling codes of all adjacent base stations 24. Thus the subscriber station then "knows" the information received on the PICH from the adjacent base station 24.

10 At this point, the subscriber station 32 then determines the power level at which the PICH is received, as this can change over time. It is presently contemplated that an indication of the transmission power level of the PICH will be provided by the transmitting base station 24, over the BCCH or other suitable channel, although any other suitable means as will occur to those of skill in the art can be employed, such as by estimation means, back-  
15 haul based communication between base stations 24, etc. It is also contemplated that the PICH power level will be provided to subscriber stations 32 as a transmission power level which is expressed relative to the transmit power of the PSCH and/or SSCH of the adjacent base station 24, whose received power levels are determined by the subscriber unit 32 as part of the above-mentioned acquisition process. Thus, the received power level of the PICH can  
20 be determined by subscriber stations 32. At this point, the subscriber station 32 "knows" the PSCH, SSCH and PICH of the next best received base station 24 and can subtract those signals from the total received signal at the subscriber station 32 to improve the SNR of the signals it receives from the base station 24 from which it is being served.

It is expected that as much as 45% or more of the total power transmitted by a  
25 base station 24 will typically be utilized to transmit the PSCH, SSCH and PICH channels. As will be apparent, subtracting these signals from the total received signal at a subscriber station 32 can result in a corresponding improvement to the SNR of the subscriber station 32.

Figure 3 shows another configuration of a system 200 wherein one or more base stations 240 employ beam forming antennas (not shown), or other means, to divide their  
30 cells 248 into different sub-cells, typically referred to as sectors 260. Each sector 260 of a base station 240 communicates with the subscriber stations 32 within its beam path and range and each sector 260 is provided with a transceiver for such communications. Figure 2

- 12 -

illustrates cells 248a, 248b and 248c as each having six sectors 260a<sub>x</sub>, 260b<sub>x</sub> and 260c<sub>x</sub> respectively. As will be apparent to those of skill in the art, cells 248 can have different numbers of sectors 260 and system 200 can include either a homogeneous set of cells 248, each with the same number of sectors 260, or can include a heterogeneous set of cells 248  
5 some of which have different numbers of sectors 260, e.g. - some cells 248 with a single sector 260, some cells 248 with two sectors 260, etc.

In these sectorized configurations, which are expected to be commonly deployed, a subscriber station, such as subscriber station 32<sub>8</sub> in sector 260a<sub>2</sub> can receive transmissions intended for an adjacent sector, such as 260a<sub>3</sub> or 260a<sub>1</sub>. Such transmissions act  
10 as interference at subscriber station 32<sub>8</sub> with respect to the transmissions it is attempting to receive from sector 260a<sub>2</sub>. Accordingly, subscriber station 32<sub>8</sub> can perform similar operations to those described above for reducing interference from adjacent base stations to reduce interference from adjacent sectors 260. Depending upon the configuration of system 200, sectors 260 within a cell 248 can transmit frames and slots in a synchronous manner  
15 (with time offset or without) to the other sectors 260 of cell 248 or asynchronously.

In the synchronous case, a subscriber station 32 will "know" the signal on the PSCH of each other sector 260 in its cell 248, the signal on the PSCH either being identical in each sector 260, or being time offset from the signal on the PSCH in the sector 260 of the subscriber station 32 by a time (usually by a slot, or multiple thereof, in a frame) known to the  
20 subscriber station 32. Thus, in this case, the subscriber station 32 can easily subtract the PSCH of adjacent sectors 260.

In systems constructed in accordance with the proposed 3GPP standard, each sector 260 will have its own scrambling code. Thus, as with the embodiments described above, the SSCH in each sector 260 transmits the scrambling code group for that sector 260  
25 and this scrambling code must be determined so that the SSCH and, as discussed below, the PICH can be subtracted. As sectors 260 within a cell 248 operate within a single base station 240, base station 240 can inform subscriber stations 32 in each sector 260 of cell 248 of the relevant scrambling code group and scrambling code by any suitable means, such as by transmission through the BCCH. Alternatively, the subscriber station 32 can determine the  
30 scrambling code group and scrambling code during an acquisition process for an adjacent sector, as described above for the adjacent base station case.

In the asynchronous case, a subscriber station 32 can treat an adjacent sector

- 13 -

260 in the same manner as that described above for an adjacent next best base station 24 and can derive the frame and slot timing from the PSCH and SSCH, etc.

As will be apparent to those of skill in the art, the above-described embodiments can be combined as required. For example, a subscriber station 32 can subtract 5 the PSCH and SSCH signals from the base station (or sector) serving it and can determine whether an adjacent sector 260 or adjacent base station 24 is the highest other source of interference for it and can adopt the appropriate strategy, from those described above, to reduce this additional interference. Further, it will be apparent to those of skill in the art that the present invention is not limited to canceling only the interference from one adjacent next 10 best base station or sector and, if radio and computational resources are available in subscriber station 32, subtraction of known or knowable signals from two or more adjacent base stations and/or sectors can be performed in addition to the subtraction of the PSCH and SSCH from the base station or sector serving the subscriber station 32.

The present invention provides an apparatus, system and method for 15 performance in the downlink direction of a CDMA telecommunications system. Known, or knowable, signals are determined and subtracted from the signals received at a subscriber station, whether a mobile or fixed station and whether the signal is voice or data or both. Subtraction of these signals improves SNR for the desired signals at the subscriber station 32, which allows transmission of the desired signals in more efficient manners, i.e. – with higher 20 (3/4 vs. 1/2, etc.) error coding rates and/or increased modulation orders (QAM64 vs QPSK), and/or allows the desired signals to be broadcast at a lower power level while being received with the same, or similar, error levels.

The above-described embodiments of the invention are intended to be examples of the present invention and alterations and modifications may be effected thereto, 25 by those of skill in the art, without departing from the scope of the invention which is defined solely by the claims appended hereto.



- 14 -

We claim:

1. A method of improving reception in a multiple access communications system, comprising the steps of :

- (i) determining at least one interfering signal transmitted from a transmitter;
- (ii) determining the received power level at a receiver of said at least one determined interfering signal;
- (iii) subtracting said at least one determined interfering signal, at said received power level, from the total signal received at said receiver; and
- (iv) determining a desired signal from the result of said subtraction.

2. The method of claim 1 wherein said at least one interfering signal is a synchronization signal.

3. The method of claim 1 wherein at least two interfering signals are transmitted by said transmitter and said receiver determines each of said at least two interfering signals and their respective received power levels and subtracts those determined interfering signals at their respective received power levels from said total received signal.

4. The method of claim 3 wherein said at least two interfering signals comprise a first synchronization signal for determining slot timing in signals transmitted by said transmitter and a second synchronization signal for determining frame timing in signals transmitted by said transmitter.

5. The method of claim 1 wherein said at least one interfering signal is a communication system control signal.

6. The method of claim 1 further comprising the steps of:

- (a) determining at least one interfering signal transmitted from another transmitter;
- (b) determining the received power level at said receiver of said at least one determined interfering signal from said another transmitter;
- (c) performing step (iii) by also subtracting the interfering signal determined at step (a)

- 15 -

at the received power level determined at step (b) from the total signal received at said receiver; and

(d) performing step (iv) to determine a desired signal from the result of the subtractions.

7. The method of claim 6 wherein said interfering signal determined in step (a) is a non interfering signal to at least one other receiver.
  8. The method of claim 7 wherein said interfering signal determined in step (a) is a pilot signal.
  9. The method of claim 6 wherein said other transmitter is an adjacent base station.
  10. The method of claim 6 wherein said other transmitter is an adjacent sector of a multi-sector base station.
  11. The method of claim 6 further comprising the step of comparing the received power level determined in step (b) to a predefined threshold level and omitting steps (c) and (d) when said threshold is not exceeded.
  12. The method of claim 11 wherein the step of comparing is performed at predefined intervals.
  13. The method of claim 6 wherein steps (a) and (b) are performed to select, from at least two other transmitters, the transmitter with the highest received power level in step (b) and steps (c) and (d) are performed for said selected other transmitter.
  14. The method of claim 13 wherein steps (a) and (b) are performed at predefined intervals to select the transmitter with the highest received power level and steps (c) and (d) are performed for said selected other transmitter.
  15. A multiple access communication system including a plurality of subscriber
-

- 16 -

stations and at least one base station to transmit signals to said subscriber stations, said subscriber stations comprising:

means to receive said signals transmitted by said at least one base station;

means to determine at least one interfering signal transmitted by said base station and the received power level of said at least one interfering signal;

means to subtract said determined at least one interfering signal at said received power level from said received signals; and

means to determine a desired signal from the result of said subtraction.

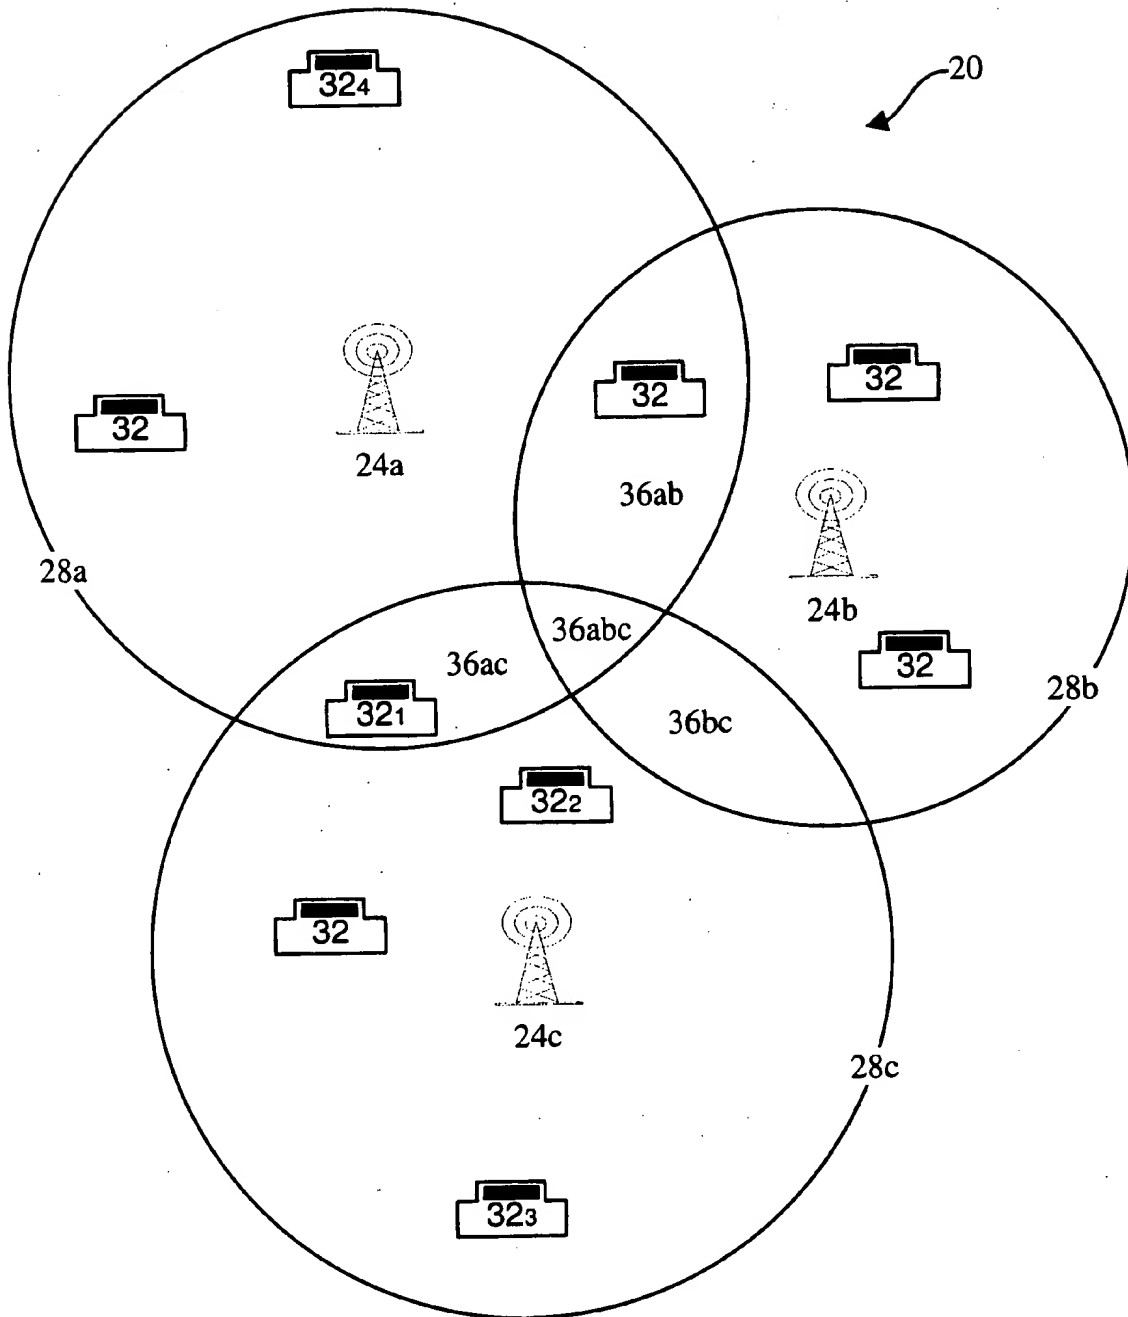
16. The communication system of claim 15 including at least first and second base stations, each base station transmitting signals to different subscriber stations of said plurality of subscriber stations, said means to determine in a subscriber station served by said first base station being operable to also determine at least one interfering signal transmitted by said second base station and the received power level of said interfering signal and said means to subtract in said subscriber station being operable to subtract said determined at least one interfering signals received from each of said first and second base stations at said received power levels respectively from said received signals and said means to determine a desired signal from the result of said subtraction.

17. The communication system of claim 15 wherein said base station includes at least first and second sectors, each of said first and second sectors transmitting signals to different subscriber stations of said plurality of subscriber stations, said means to determine in a subscriber station served by said first sector being operable to also determine at least one interfering signal transmitted by said second sector and the received power level of said interfering signal and said means to subtract in said subscriber station being operable to subtract said determined at least one interfering signals received from each of said first and second sections at said respective received power levels from said received signals and said means to determine a desired signal from the result of said subtraction.

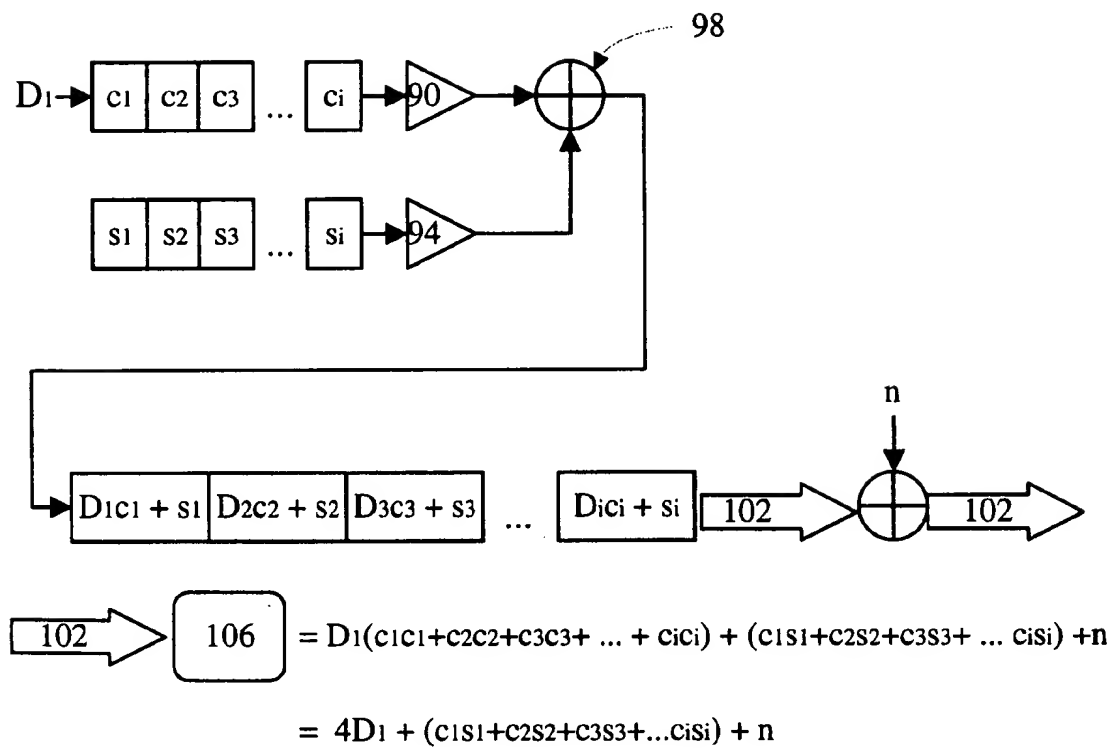
- 17 -

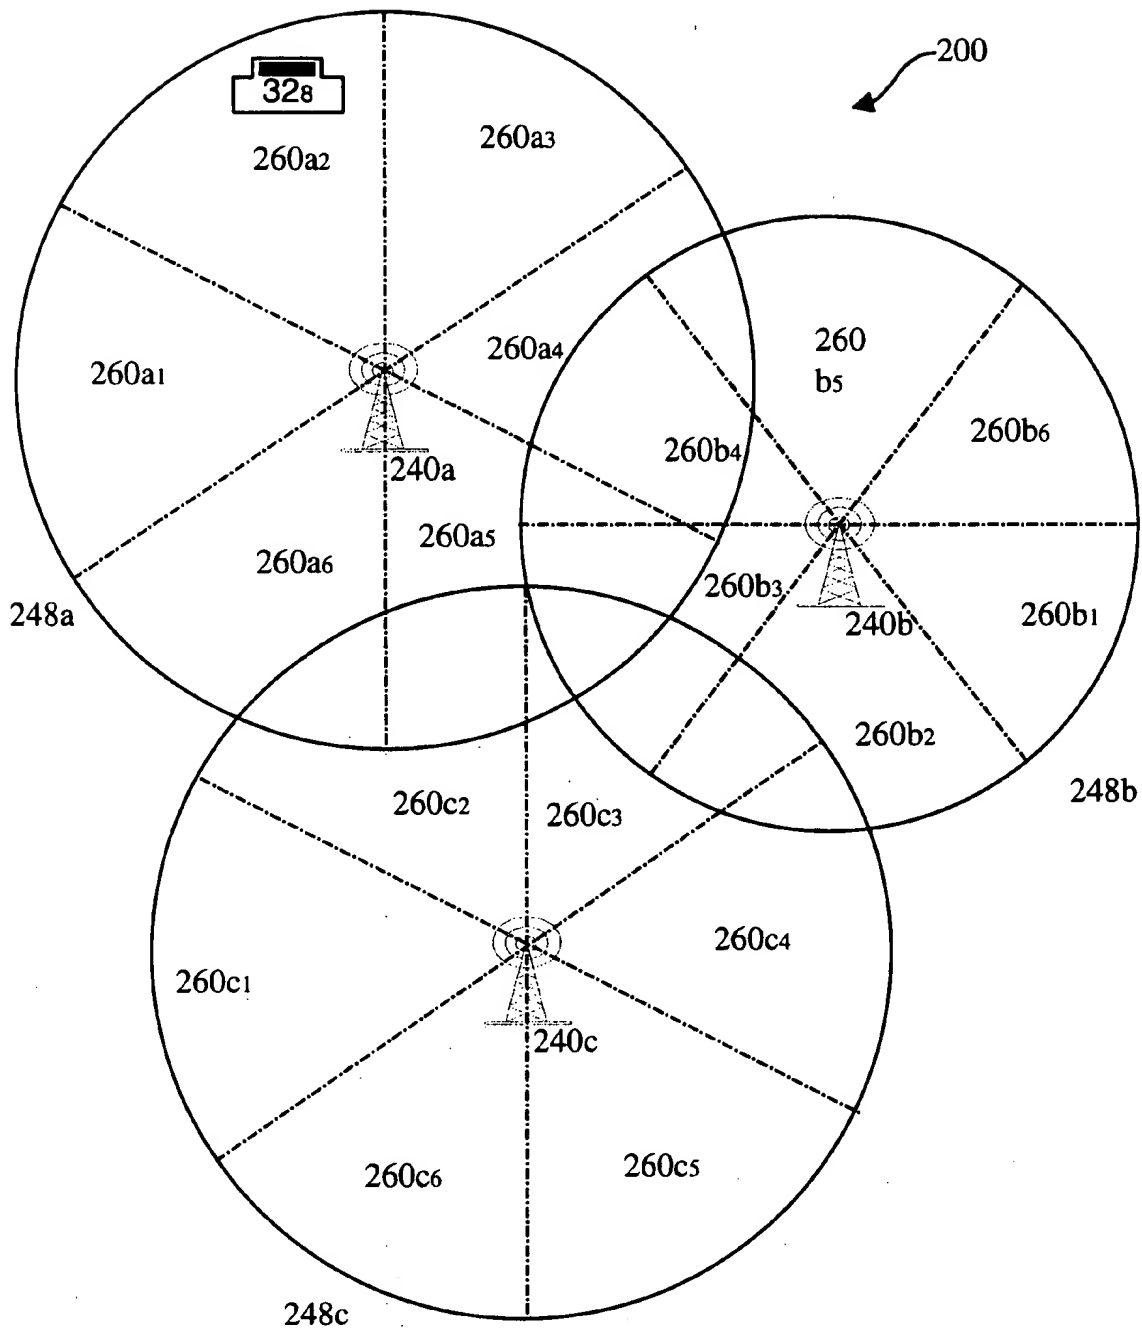
**ABSTRACT**

An apparatus, system and method for improving the SNR of a desired signal received at a receiver in a multiple access communication system is disclosed. The apparatus, system and method subtracts known or knowable signals from the total signal received at the receiver and the desired signal is then determined from the result of the subtraction. The known, or knowable, signals can be synchronization signals or other interfering channel signals transmitted by the transmitter, such as a wireless network base station, serving the receiver, such as a subscriber station in such a wireless network, and/or can be such signals transmitted by another transmitter, such as an adjacent base station, or an adjacent sector in multi-sector systems.



**Fig. 1**

**Fig. 2**



**Fig. 3**